


Basis

Gasket material based on Aramid fiber, inorganic fillers with NBR binder.

Application


Suitable for oils, fuels, lubricants, alcohols, gases, hydrocarbons, steam, water, cooling liquids, most diluted acids and alkalis for medium stress conditions.

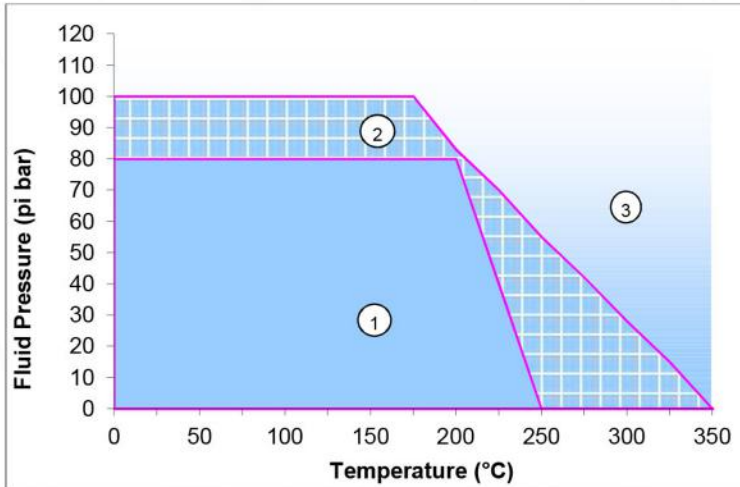

Area of application

- This area refer, the gasket material is normally suitable subject to chemical compatibility.
- This area refer, the gasket material may be suitable but a technical support is recommended.
- This area refer, do not install the gasket without technical evaluation.

AF OIL-250

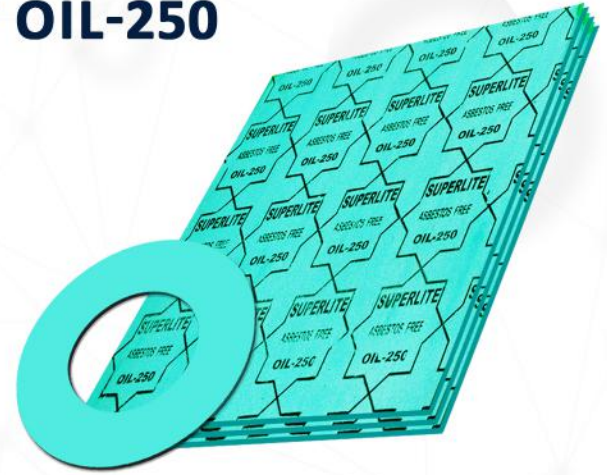

Dimensions of the standard sheets:

Standard sheet sizes:

- 1500 X 1500 mm, 1500 X 2250 mm
- 1500 X 4500 mm, 1500 X 1000 mm, 1000 X 1000 mm
- 1500 X 4000 mm, 1500 X 2000 mm, 1300 X 3900 mm
- 1270 X 1270 mm, 2100 X 3000 mm, 1500 X 3000 mm

Compliance: BS 7531, Grade Y

Specification: ASTM

Finish: Green, Blue, Grey, White

(Other Colour on Customer requirement)

Technical data

All data are typical values and refer to sheet thickness of 2.00 mm / Test sample 1.50 mm

	TEST METHOD	SPECIFIED VALUE	UNIT
Max. Peak Temperature		350	°C
Max Operating Temperature		250	°C
Max. Operating Pressure		100	bar
Density	ASTM F 1315	1.60-1.90	g/cm ³
Compressibility	ASTM F 36 J / BS 7531	5-15.0	%
Recovery	ASTM F 36 J / BS 7531	≥ 50.0	%
Tensile Strength	ASTM F 152	≥ 10.50	N/mm ²
Gas Permeability	BS 7531	≤ 1.0	ml/min.
ASTM oil no.3 (5h, 150°C)	ASTM F 146 / BS 7531		
Thickness Increase		≤ 10.0	%
Weight Increase		≤ 10.0	%
Fuel B (5h, 23°C)	ASTM F 146		
Thickness Increase		≤ 10.0	%
Weight Increase		≤ 10.0	%
Water (5h, 100°C)	ASTM F 146 / BS 7531		
Thickness Increase		≤ 10.0	%
Weight Increase		≤ 10.0	%
Stress Relaxation (16h X 300°C 2.0mm/1.50mm)	DIN 52913 / BS 7531	≥ 18.0	MPA
Flexibility	BS 7531	No sign of cracks	-

All information and recommendations given in this brochure to the best of our knowledge. However, in view of the wide variety of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, Information can only serve as a guideline.